
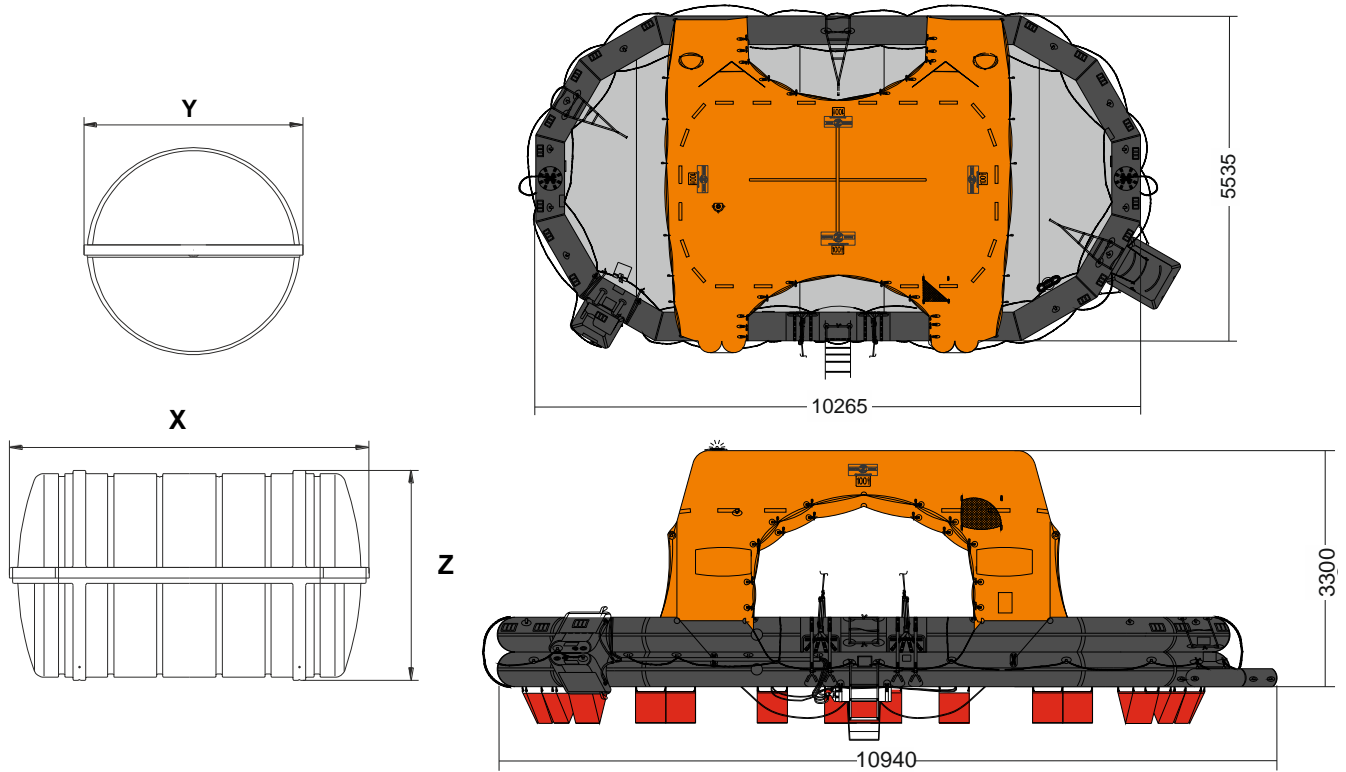


MARINE EVACUATION SYSTEM (MES) 100 MAN THROW OVER BOARD VENTURI SELF RIGHTING LIFERAFT WITH CENTRAL BOWSING LINES ASSOCIATED WITH SMALL INFLATABLE SLIDE (SIS)




100 MAN	A PACK			B PACK		
Container	N29			N26		
Dimensions	X: 1950 mm	Y: 1050 mm	Z: 1000 mm	X: 1950 mm	Y: 970 mm	Z: 925 mm
	X: 6' 4,78"	Y: 3' 5,34"	Z: 3' 3,38"	X: 6' 4,78"	Y: 3' 2,19"	Z: 3' 0,42"
Liferaft Net Weight	560 kg / 1235 pounds			423 kg / 933 pounds		
Max. height stowage	20 m / 66'			20 m / 66'		
Painter line length	35 m / 115'					
Inflation Cylinder	3 x 27 liter + 1 x 2,83 liter					
 Crate	X: 2050 mm	Y: 1150 mm	Z: 1200 mm	X: 2050 mm	Y: 1150 mm	Z: 1200 mm
	X: 6' 8,71"	Y: 3' 9,28"	Z: 3' 11,25"	X: 6' 8,71"	Y: 3' 9,28"	Z: 3' 11,25"
	610 kg / 1345 pounds			454 kg / 1001 pounds		
	2,829 m3 / 99,9 cubic foot			2,829 m3 / 99,9 cubic foot		
Towing force	2 knots			3 knots		
Without sea anchor	220 daN			433 daN		
With sea anchor	265 daN			518 daN		


100 TOSRV MES SIS CBL 22022017 KLT.doc	Issue: 2	Date: 22/02/2017
--	----------	------------------

Dimensions and weight +/- 5%
 SURVITEC SAS reserves the right to change specification without notice.
 For installation, add minimum +10mm for clearance to dimensions of the container.


SIS (SMALL INFLATABLE SLIDE)

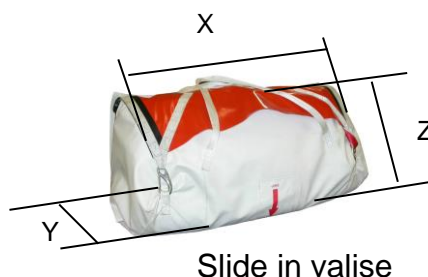

SIS	1,70 m			2,20 m		
Valise						
Dimensions	X:670mm	Y:300mm	Z:260mm	X:720mm	Y:425mm	Z:295mm
	X:2' 2,38"	Y:1' 11,82"	Z:10,24"	X:2' 4,35"	Y:1' 4,74"	Z:11,62"
Slide net weight	15 kg / 34 pounds			19 kg / 42 pounds		
Max. evacuation height	1,70 m			2,20 m		
Firing line length	1,50 m			1,50 m		
Inflation cylinder	1 x 2,83 litres			1 x 4 litres		

 <p>Crate</p>	X:830mm	Y:540mm	Z:330mm	X:830mm	Y:540mm	Z:330mm
	X:2' 8,68"	Y:1' 9,26"	Z:1' 1"	X:2' 8,68"	Y:1' 9,26"	Z:1' 1"
	17,6 kg / 39 pounds			21,6 kg / 48 pounds		
	0,148 m3 / 5,23 cubic foot			0,148 m3 / 5,23 cubic foot		

SIS	2,70 m			3,20 m		
Valise						
Dimensions	X:720mm	Y:450mm	Z:295mm	X:800mm	Y:450mm	Z:295mm
	X:2' 4,35"	Y:1' 5,72"	Z:11,62"	X:2' 7,5"	Y:1' 5,72"	Z:11,62"
Slide net weight	27 kg / 60 pounds			28,5 kg / 63 pounds		
Max. evacuation height	2,70 m			3,20 m		
Firing line length	1,50 m			1,50 m		
Inflation cylinder	1 x 6 litres			1 x 6,7 litres		

 <p>Crate</p>	X:830mm	Y:540mm	Z:330mm	X:830mm	Y:540mm	Z:330mm
	X:2' 8,68"	Y:1' 9,26"	Z:1' 1"	X:2' 8,68"	Y:1' 9,26"	Z:1' 1"
	29,6 kg / 66 pounds			31,1 kg / 69 pounds		
	0,148 m3 / 5,23 cubic foot			0,148 m3 / 5,23 cubic foot		

100 TOSRV MES SIS CBL 22022017 KLT.doc

Issue: 2


Date: 22/02/2017

Dimensions and weight +/- 5%
 SURVITEC SAS reserves the right to change specification without notice.
 For installation, add minimum +10mm for clearance to dimensions of the container.



Slide in valise

SIS	3,80 M		
	Valise		
Dimensions	X: 820 mm	Y: 450 mm	Z: 350 mm
	X: 2' 8,29"	Y: 1' 5,72"	Z: 1' 1,78"
Slide net weight	37 kg / 82 pounds		
Max. evacuation height	3,8 m / 13'		
Firing line length	1,5 m / 5'		
Inflation cylinder	1 x 10 liter		



Crate

X: 920 mm	Y: 560 mm	Z: 370 mm
X: 3' 0,23"	Y: 1' 10,05"	Z: 1' 2,57"
40 kg / 89 pounds		
0,191 m ³ / 6,74 cubic foot		

Approvals:	EC (MED)
-------------------	-----------------

100 TOSRV MES SIS CBL 22022017 KLT.doc	Issue: 2	Date: 22/02/2017
--	----------	------------------

Dimensions and weight +/- 5%
 SURVITEC SAS reserves the right to change specification without notice.
 For installation, add minimum +10mm for clearance to dimensions of the container.