
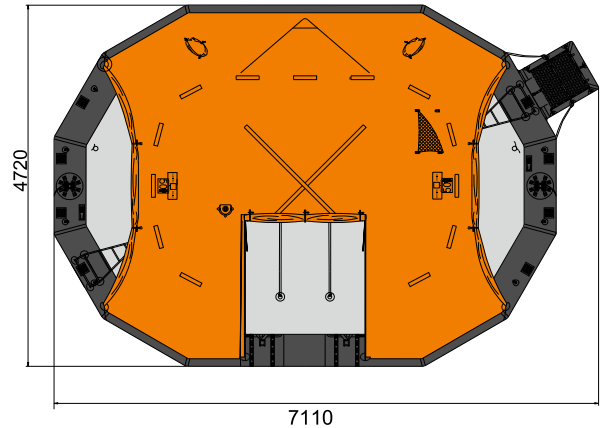
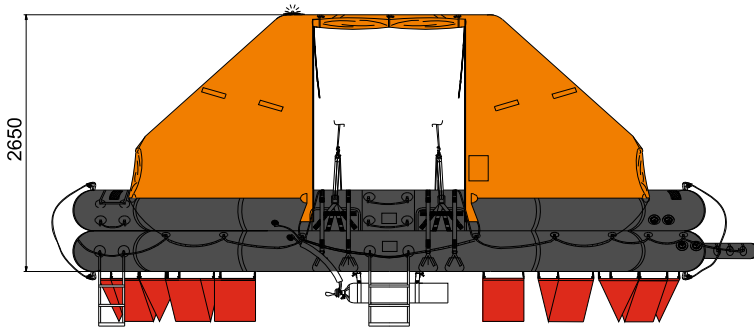


MARINE EVACUATION SYSTEM (MES) 50 MAN THROW OVER BOARD LIFERAFT WITH CENTRAL BOWSING LINES ASSOCIATED WITH SMALL INFLATABLE SLIDE (SIS)



| 50 MAN CBL | A PACK | | | B PACK | | |
|--|-----------------------------|---------------------------|---------------------------|-----------------------------|--------------------------|---------------------------|
| Container | N20 | | | N18 | | |
| Dimensions | X: 1560 mm X: 5' 1,42" | Y: 952 mm Y: 3' 1,49" | Z: 960 mm Z: 3' 1,8" | X: 1560 mm X: 5' 1,42" | Y: 852 mm Y: 2' 9,55" | Z: 835 mm Z: 2' 8,88" |
| Liferaft Net Weight | 351 kg / 774 pounds | | | 240 kg / 530 pounds | | |
| Max. height stowage | 20 m / 66' | | | 20 m / 66' | | |
| Painter line length | 14 m / 46' | | | | | |
| Inflation Cylinder | 2 x 27 liter | | | | | |
|  Crate | X: 1640 mm X: 5' 4,57" | Y: 1050 mm Y: 3' 5,34" | Z: 1150 mm Z: 3' 9,28" | X: 1640 mm X: 5' 4,57" | Y: 940 mm Y: 3' 1,01" | Z: 1010 mm Z: 3' 3,77" |
| | 380 kg / 838 pounds | | | 270 kg / 596 pounds | | |
| | 1,981 m3 / 69,93 cubic foot | | | 1,558 m3 / 54,98 cubic foot | | |
| Towing force | 2 knots | | | 3 knots | | |
| Without sea anchor | 158 daN | | | 242 daN | | |
| With sea anchor | 203 daN | | | 327 daN | | |

| | | |
|------------------------------------|----------|------------------|
| 50 TO MES SIS CBL 22022017 KLT.doc | Issue: 3 | Date: 22/02/2017 |
|------------------------------------|----------|------------------|


Dimensions and weight +/- 5%
 SURVITEC SAS reserves the right to change specification without notice.
 For installation, add minimum +10mm for clearance to dimensions of the container.

SIS (SMALL INFLATABLE SLIDE)




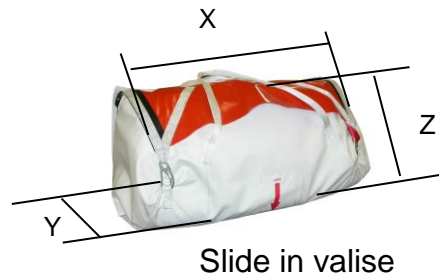
Slide in valise

| SIS | 1,70 m | | | 2,20 m | | |
|------------------------|-----------------------|---------------------|---------------------|-----------------------|-----------------------|---------------------|
| Valise | | | | | | |
| Dimensions | X:670mm X:2' 2,38" | Y:300mm Y:11,82" | Z:260mm Z:10,24" | X:720mm X:2' 4,35" | Y:425mm Y:1' 4,74" | Z:295mm Z:11,62" |
| Slide net weight | 15 kg / 34 pounds | | | 19 kg / 42 pounds | | |
| Max. evacuation height | 1,70 m | | | 2,20 m | | |
| Firing line length | 1,50 m | | | 1,50 m | | |
| Inflation cylinder | 1 x 2,83 litres | | | 1 x 4 litres | | |


| | | | | | | |
|---|----------------------------|-----------------------|--------------------|----------------------------|-----------------------|--------------------|
|  <p>Crate</p> | X:830mm X:2' 8,68" | Y:540mm Y:1' 9,26" | Z:330mm Z:1' 1" | X:830mm X:2' 8,68" | Y:540mm Y:1' 9,26" | Z:330mm Z:1' 1" |
| | 17,6 kg / 39 pounds | | | 21,6 kg / 48 pounds | | |
| | 0,148 m3 / 5,23 cubic foot | | | 0,148 m3 / 5,23 cubic foot | | |

| SIS | 2,70 m | | | 3,20 m | | |
|------------------------|-----------------------|-----------------------|---------------------|----------------------|-----------------------|---------------------|
| Valise | | | | | | |
| Dimensions | X:720mm X:2' 4,35" | Y:450mm Y:1' 5,72" | Z:295mm Z:11,62" | X:800mm X:2' 7,5" | Y:450mm Y:1' 5,72" | Z:295mm Z:11,62" |
| Slide net weight | 27 kg / 60 pounds | | | 28,5 kg / 63 pounds | | |
| Max. evacuation height | 2,70 m | | | 3,20 m | | |
| Firing line length | 1,50 m | | | 1,50 m | | |
| Inflation cylinder | 1 x 6 litres | | | 1 x 6,7 litres | | |

| | | | | | | |
|---|----------------------------|-----------------------|--------------------|----------------------------|-----------------------|--------------------|
|  <p>Crate</p> | X:830mm X:2' 8,68" | Y:540mm Y:1' 9,26" | Z:330mm Z:1' 1" | X:830mm X:2' 8,68" | Y:540mm Y:1' 9,26" | Z:330mm Z:1' 1" |
| | 29,6 kg / 66 pounds | | | 31,1 kg / 69 pounds | | |
| | 0,148 m3 / 5,23 cubic foot | | | 0,148 m3 / 5,23 cubic foot | | |



| SIS | 3,80 M | | |
|------------------------|-------------------|-------------|-------------|
| | Valise | | |
| Dimensions | X: 820 mm | Y: 450 mm | Z: 350 mm |
| | X: 2' 8,29" | Y: 1' 5,72" | Z: 1' 1,78" |
| Slide net weight | 37 kg / 82 pounds | | |
| Max. evacuation height | 3,8 m / 13' | | |
| Firing line length | 1,5 m / 5' | | |
| Inflation cylinder | 1 x 10 liter | | |

| | | | |
|---|-------------------|--------------|-------------|
|  <p>Crate</p> | X: 920 mm | Y: 560 mm | Z: 370 mm |
| | X: 3' 0,23" | Y: 1' 10,05" | Z: 1' 2,57" |
| | 40 kg / 89 pounds | | |
| 0,191 m3 / 6,74 cubic foot | | | |

| | |
|-------------------|-----------|
| Approvals: | EC |
|-------------------|-----------|

| | | |
|------------------------------------|----------|------------------|
| 50 TO MES SIS CBL 22022017 KLT.doc | Issue: 3 | Date: 22/02/2017 |
|------------------------------------|----------|------------------|

Dimensions and weight +/- 5%
 SURVITEC SAS reserves the right to change specification without notice.
 For installation, add minimum +10mm for clearance to dimensions of the container.