



RESCUE BOAT RIBO 340 P SLING

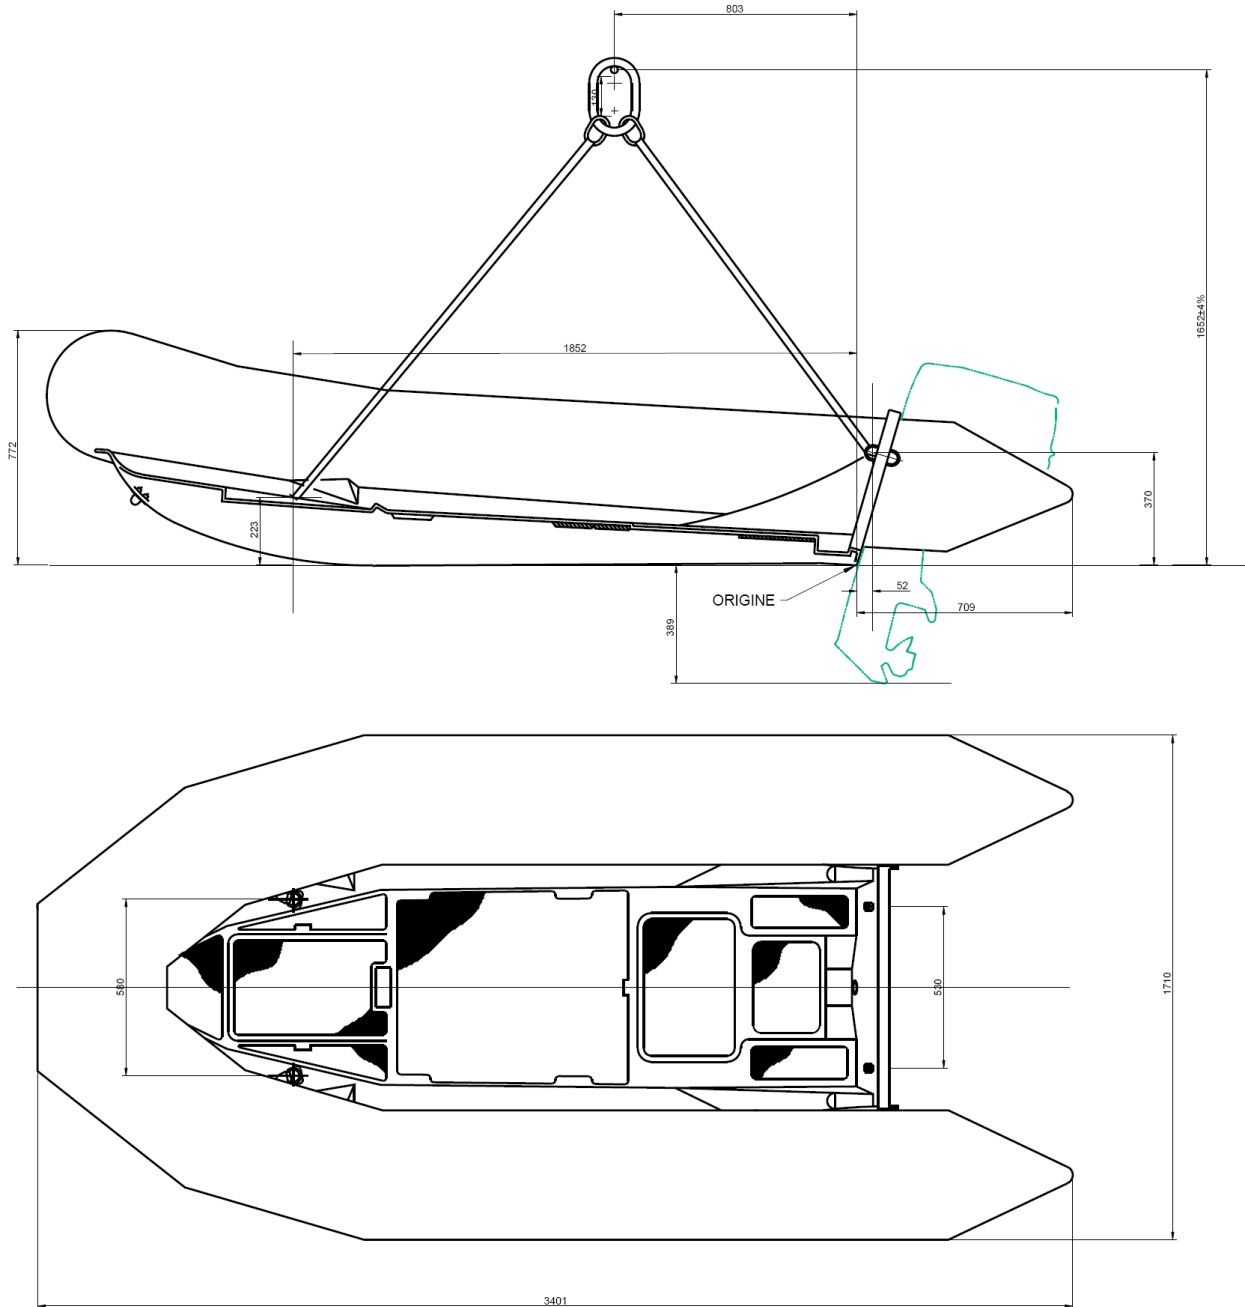

Overall dimensions with lifting sling

CAPACITY				
Number of persons: 5			Buoyancy volume: 1054 l / 37.22 cft	
DIMENSIONS				
Length		Width		Buoyancy diameter
Overall	Inside	Overall	Inside	0.45 m / 1'49"
3.40 m / 11'2"	2.30 m / 7'55"	1.71 m / 5'61"	0.80 m / 2'62"	
SAFETY / INFLATION				
. 5 airtight compartments		. 5 inflation valves		. 5 overpressure valves
WEIGHT				
With equipment & batteries		With equipment, engine (25 CV) & fuel		Operational weight with passengers (25 CV)
129 kg / 284.4 lbs		229 kg / 504.9 lbs		641,5 kg / 1414.3 lbs
ENGINE				
Shaft length		Engine power		Fuel tanks
long		25 CV 19 kw		2 x 25 l 2 x 6.6 l USCG
TOWING				
. 2 bow towing rings on hull		. 1 bow towing V with on load release shackle		
. 2 towing points on transom		. 1 aft towing V with snap hook		
HOISTING				
. 2 bow lifting points		. 2 aft lifting points on transom		. 1 lifting sling
FABRIC				
. Neoprene fabric		. Buoyancy		
. Reflective tapes		. Peripheral rubbing strake		
HULL				
. GRP composite rigid orange hull		. Reflective tapes		
. 1 hull drain				

TRANSOM	
. 1 self bailer	. Engine aluminium mounting plate + wooden plate
HANDLING	
. 2 inside lifelines	. 2 outside lifelines
SEATING	
. 1 fixed bench	. 1 tiltable bench
EQUIPMENT FIXED TO THE RESCUE BOAT	
. Towing line 50m . Boat hook . Removable bow cover	. Righting lines (2) . Flashing light
. Rescue quoits (2) . Radar reflector	. Boarding ladder
OTHER EQUIPMENT	
. Compass . Sponge (2) . First aid kit . Search light . Thermal protective aid (2)	. Whistle . Sea anchor . Floating knife . Electrical torch
. Bailer . Repair kit . Fire extinguisher . Torch spare bulb & batteries . Telescopic paddles (2)	. Pump . Manual . Equipment bag
OPTIONS	
. Release hook: SWL \geq 750 kg	. Overall cover
. SOLAS Engine: Yamaha 25HP	Maximum towing force: 165 daN Engine weight: 56kg
. Propeller pitch: 3 x 9 ^{7/8} x 10 ^{1/2}	

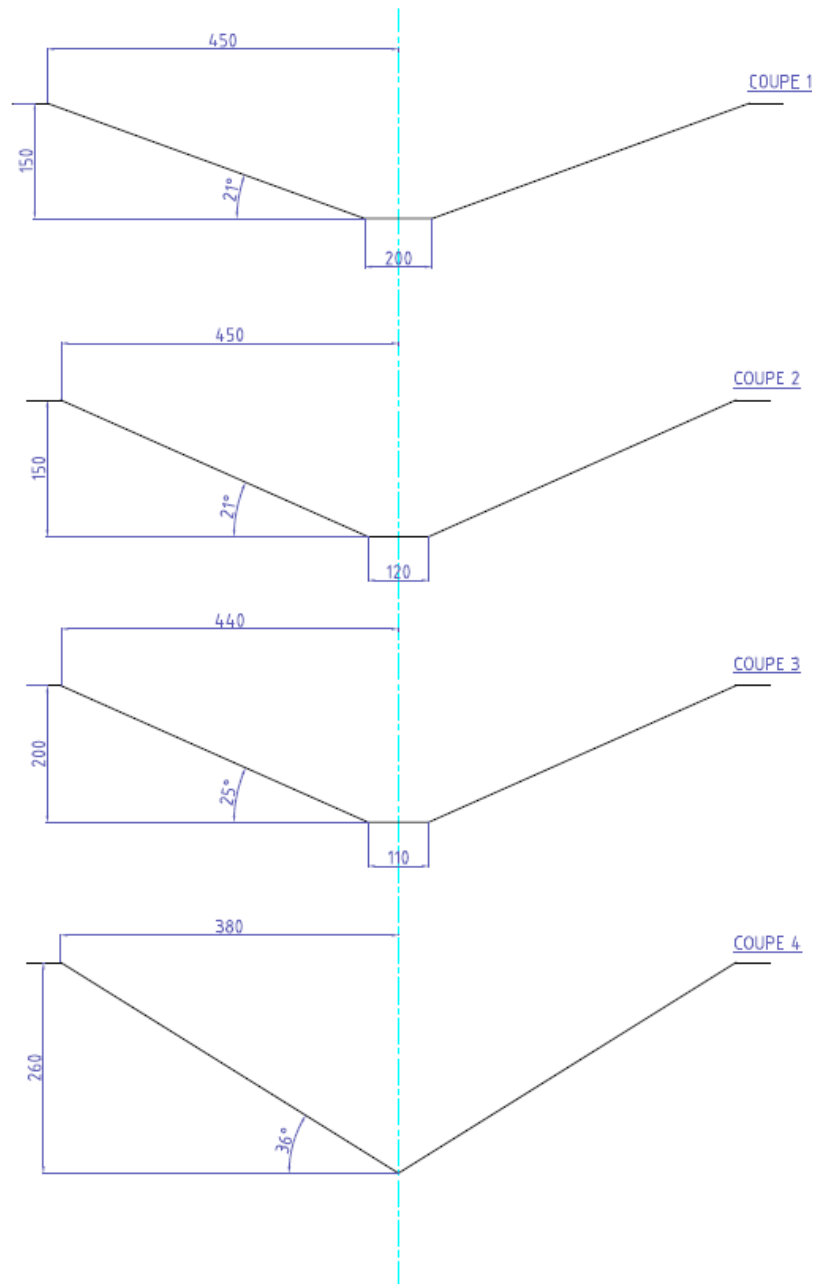

Hull profile

Approvals:	BV – TC
-------------------	----------------

RIBO 340 Neo 13092017 KLT	Issue: 9	Date: 13/09/2017
---------------------------	----------	------------------

Dimensions and weight +/- 5%
 SURVITEC SAS reserves the right to change specification without notice.
 For installation, add minimum +10mm for clearance to dimensions of the container.