
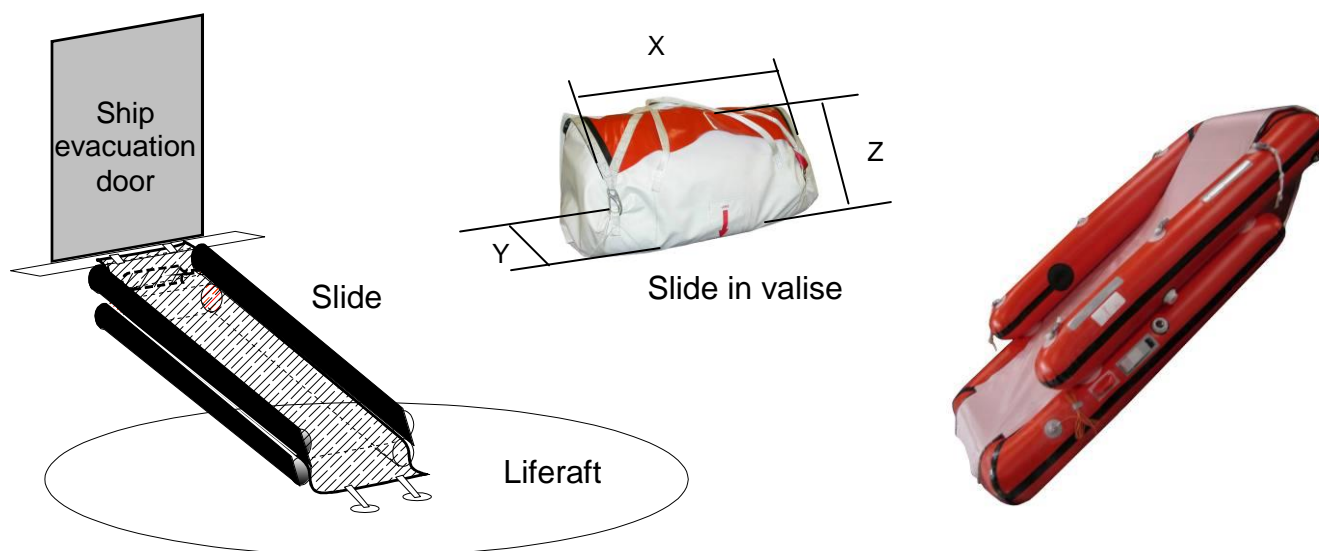



## SMALL INFLATABLE SLIDE (SIS) ASSOCIATED WITH ORIL 30/50/100/151 AND LIFERAFTS 50/100/150



MES SIS	1,70 m			2,20 m		
<b>Valise</b>						
Dimensions	X:670mm	Y:300mm	Z:260mm	X:720mm	Y:425mm	Z:295mm
	X:2' 2,38"	Y:1' 11,82"	Z:10,24"	X:2' 4,35"	Y:1' 4,74"	Z:11,62"
Slide net weight	15 kg / 34 pounds			19 kg / 42 pounds		
Max. evacuation height	1,70 m			2,20 m		
Firing line length	1,50 m			1,50 m		
Inflation cylinder	1 x 2,83 litres			1 x 4 litres		
 Crate	X:830mm	Y:540mm	Z:330mm	X:830mm	Y:540mm	Z:330mm
	X:2' 8,68"	Y:1' 9,26"	Z:1' 1"	X:2' 8,68"	Y:1' 9,26"	Z:1' 1"
	17,6 kg / 39 pounds			21,6 kg / 48 pounds		
	0,148 m3 / 5,23 cubic foot			0,148 m3 / 5,23 cubic foot		

MES SIS	2,70 m			3,20 m		
<b>Valise</b>						
Dimensions	A:720mm	B:450mm	C:295mm	A:800mm	B:450mm	C:295mm
	A:2' 4,35"	B:1' 5,72"	C:11,62"	A:2' 7,5"	B:1' 5,72"	C:11,62"
Slide net weight	27 kg / 60 pounds			28,5 kg / 63 pounds		
Max. evacuation height	2,70 m			3,20 m		
Firing line length	1,50 m			1,50 m		
Inflation cylinder	1 x 6 litres			1 x 6,7 litres		
 Crate	X:830mm	Y:540mm	Z:330mm	X:830mm	Y:540mm	Z:330mm
	X:2' 8,68"	Y:1' 9,26"	Z:1' 1"	X:2' 8,68"	Y:1' 9,26"	Z:1' 1"
	29,6 kg / 66 pounds			31,1 kg / 69 pounds		
	0,148 m3 / 5,23 cubic foot			0,148 m3 / 5,23 cubic foot		

**Approvals:**

**EC - USCG**

SIS 28102015 KLT.doc

Issue: 4

Date: 28/10/2015

Dimensions and weight +/- 5%  
SURVITEC SAS reserves the right to change specification without notice.  
For installation, add minimum +10mm for clearance to dimensions of the container.