



# RESCUE BOAT RIBO 340 P SLING

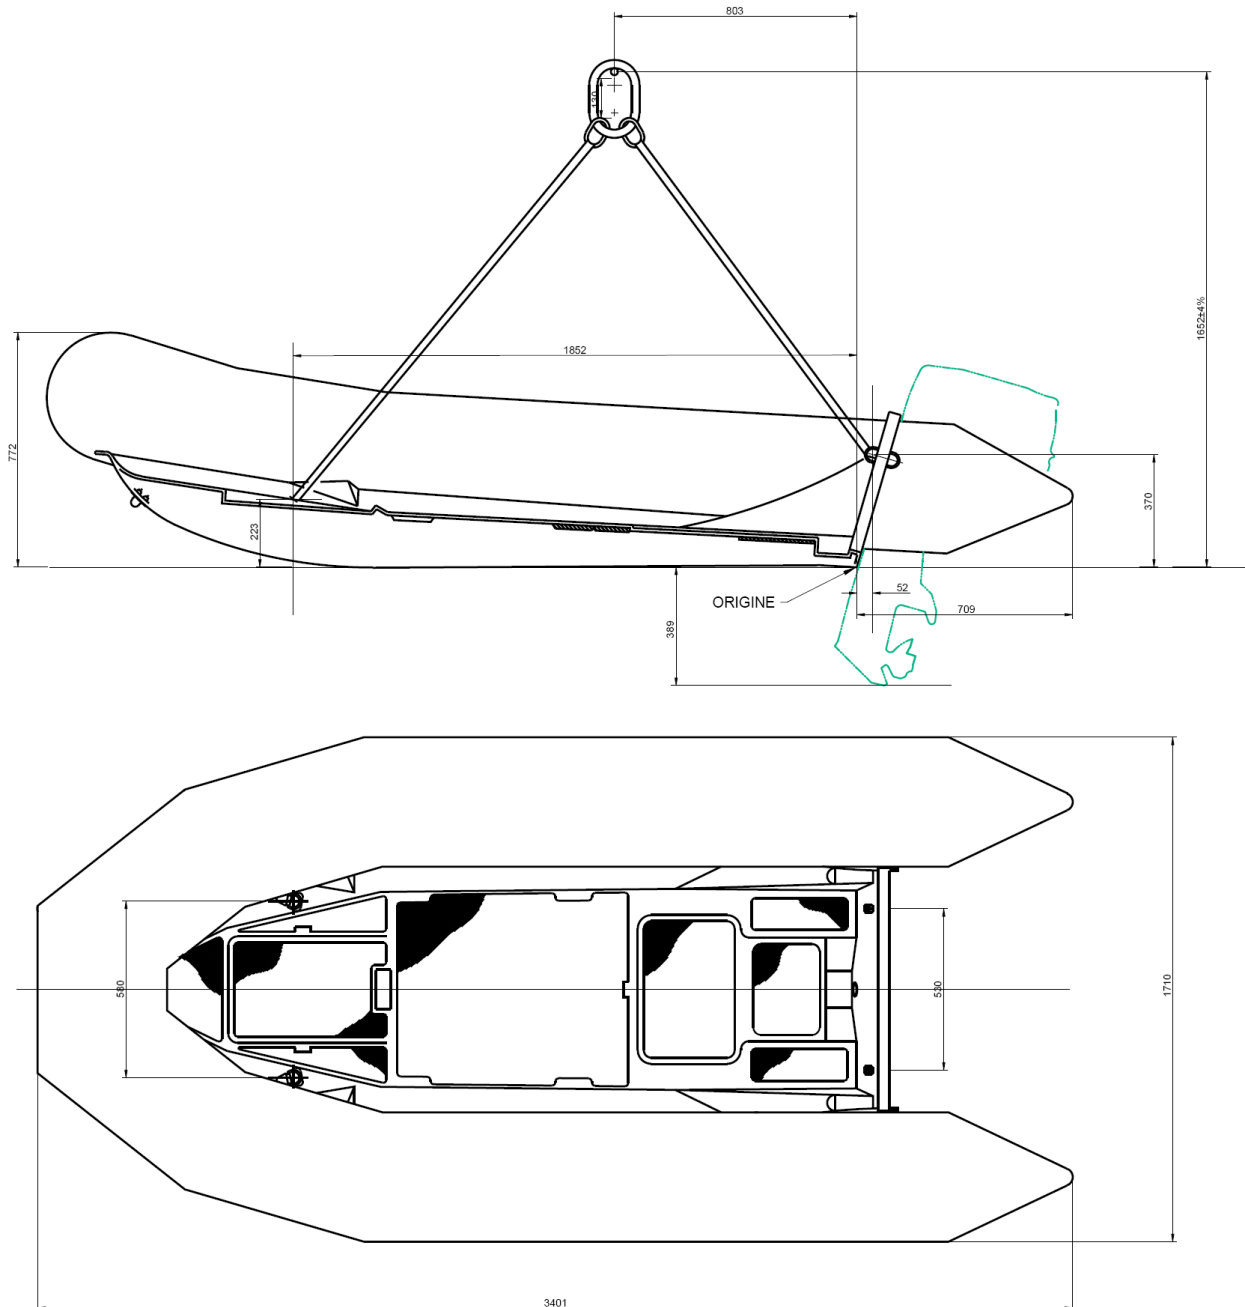

Overall dimensions with lifting sling

CAPACITY				
Number of persons: 5			Buoyancy volume: 1054 l / 37.22 cft	
DIMENSIONS				
Length		Width		Buoyancy diameter
Overall	Inside	Overall	Inside	
3.40 m / 11'2"	2.30 m / 7'55"	1.71 m / 5'61"	0.80 m / 2'62"	
0.45 m / 1'49"				
SAFETY / INFLATION				
. 5 airtight compartments		. 5 inflation valves		. 5 overpressure valves
WEIGHT				
With equipment & batteries		With equipment, engine (25 CV) & fuel		Operational weight with passengers (25 CV)
129 kg / 284.4 lbs		229 kg / 504.9 lbs		641,5 kg / 1414.3 lbs
ENGINE				
Shaft length		Engine power		Fuel tanks
long		25 CV 19 kw		2 x 25 l 2 x 6.6 l USCG
TOWING				
. 2 bow towing rings on hull		. 1 bow towing V with on load release shackle		
. 2 towing points on transom		. 1 aft towing V with snap hook		
HOISTING				
. 2 bow lifting points		. 2 aft lifting points on transom		. 1 lifting sling
FABRIC				
. Neoprene fabric		. Buoyancy		
. Reflective tapes		. Peripheral rubbing strake		
HULL				
. GRP composite rigid orange hull		. Reflective tapes		
. 1 hull drain				

TRANSOM			
. 1 self bailer	. Engine aluminium mounting plate + wooden plate		
HANDLING			
. 2 inside lifelines	. 2 outside lifelines		
SEATING			
. 1 fixed bench	. 1 tiltable bench		
EQUIPMENT FIXED TO THE RESCUE BOAT			
. Towing line 50m	. Righting lines (2)	. Rescue quoits (2)	. Boarding ladder
. Boat hook	. Flashing light	. Radar reflector	
. Removable bow cover			
OTHER EQUIPMENT			
. Compass	. Whistle	. Bailer	. Pump
. Sponge (2)	. Sea anchor	. Repair kit	. Manual
. First aid kit	. Floating knife	. Fire extinguisher	. Equipment bag
. Search light	. Electrical torch	. Torch spare bulb & batteries	
. Thermal protective aid (2)		. Telescopic paddles (2)	
OPTIONS			
. Release hook: SWL $\geq$ 750 kg		. Overall cover	
. <b>SOLAS Engine:</b> Yamaha 25HP		Maximum towing force: 165 daN	
		Engine weight: 56kg	
. Propeller pitch: 3 x 9 <sup>7/8</sup> x 10 <sup>1/2</sup>			

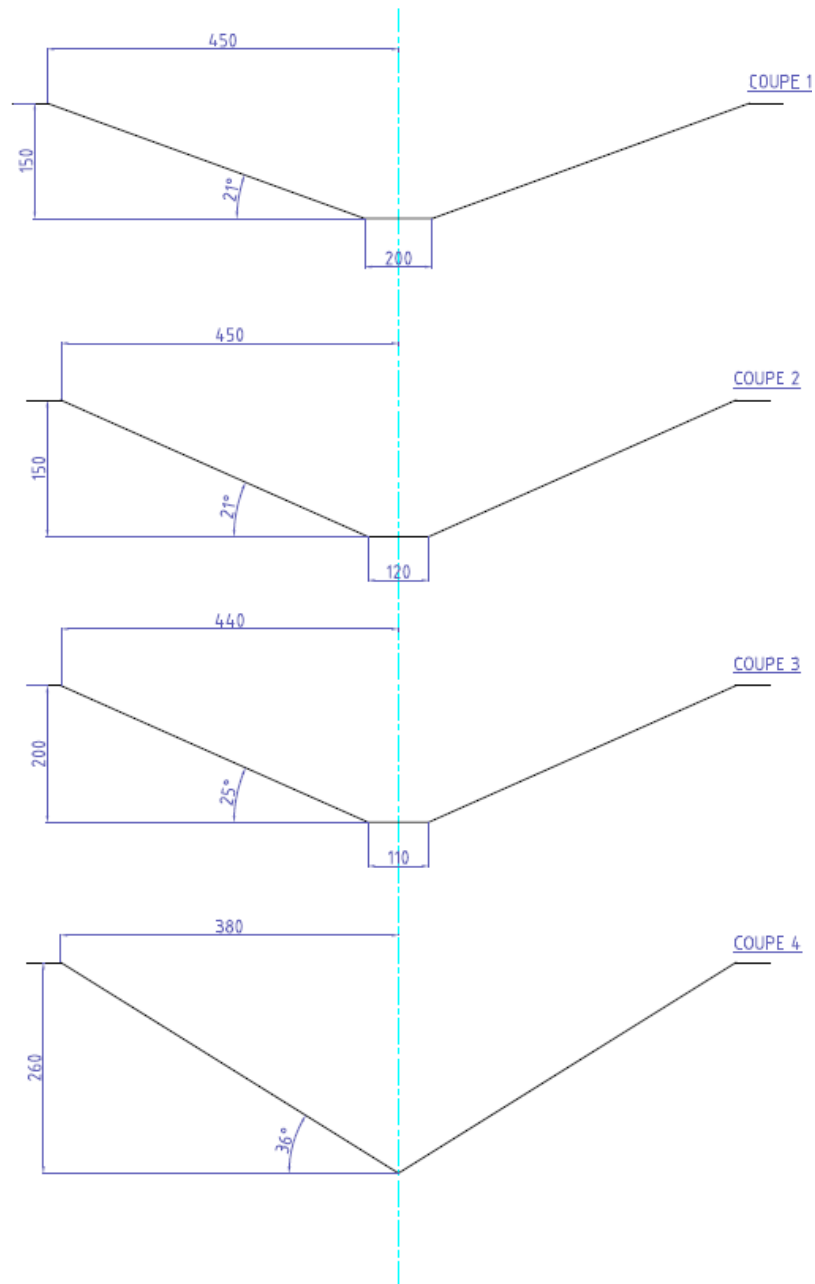

Hull profile

<b>Approvals:</b>	<b>BV – TC</b>
-------------------	----------------

RIBO 340 Neo.doc	Issue: 9	Date: 13/09/2017
------------------	----------	------------------

Dimensions and weight +/- 5%  
 SURVITEC SAS reserves the right to change specification without notice.  
 For installation, add minimum +10mm for clearance to dimensions of the container.